

SWDOK 2

Separator de uleiuri si hidrocarburi cu dublu decantor si filtru coalescent

Debit: 3 – 10 l/s


Clasa de retentie: <5 mg/l

Echipament:

- camera decantare dubla
- camera separare
- filtru coalescent
- dispozitiv prelevare probe
- obturator automat
- ventilatie

Echipamente optionale:

- extensii
- alarma
- capac carosabil

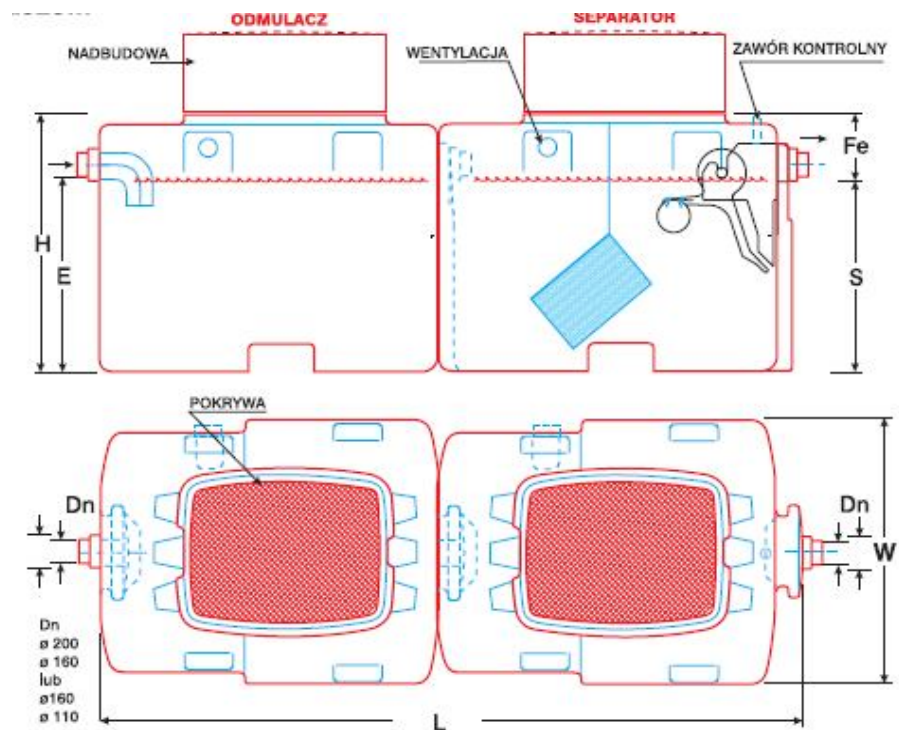

MODEL	Debit	Volum total	Volum camera separare	Volum hidrocarburi depozitate	Volum camera decantare	Volum namol depozitat	L	W	H	Dn	E/S	Greutate	Extensii
M.U.	l/s	l	l	l	l	l	mm	mm	mm	mm	mm	kg	Type
SWDOK 2- 3	3	920	270	176	600	390	1470	980	1090	160	750/ 720	60	A
SWDOK 2- 5	5	1682	450	293	1000	650	1986	1035	1040	160	810/ 780	100	B
SWDOK 2- 6	6	2760	540	351	1200	780	4250	980	1090	160	720/ 690	180	A
SWDOK 2- 8	8	2760	720	468	1600	1050	4250	980	1090	160	720/ 690	185	A
SWDOK 2- 10	10	3364	900	585	2000	1300	3892	1035	1040	160	800/ 670	200	B