

## SWOBK

### Separator de uleiuri si hidrocarburi cu trapa de namol/decantor, filtru coalescent, by-pass si inchidere automata

Debit: 3 – 100 l/s


Clasa de retentie: <5 mg/l

#### Echipament:

- camera decantare
- camera separare
- filtru coalescent
- by-pass (x 5)
- dispozitiv prelevare probe
- obturator automat
- ventilatie

#### Echipamente optionale:

- extensii
- alarma
- capac carosabil

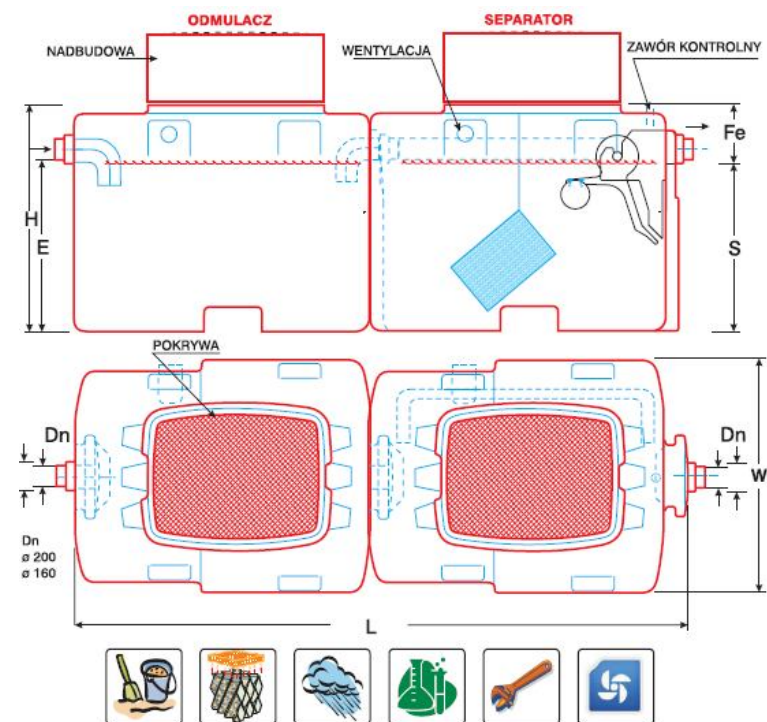

MODEL	Debit	Volum total	Volum camera separare	Volum hidrocarburi depozitate	Volum camera decantare	Volum namol depozitat	L	W	H	Dn	E/ S	Greutate	Extensii
M.U.	l/s	l	l	l	l	l	mm	mm	mm	mm	mm	kg	Type
SWOBK 3	3- 15	1840	270	176	300	195	2860	980	1090	200	705/ 670	120	A
SWOBK 5	5- 25	1840	450	293	500	325	2860	980	1090	250	705/ 670	125	A
SWOBK 6	6- 30	1840	540	351	600	390	2860	980	1090	250	705/ 670	135	A
SWOBK 8	8- 40	1840	720	468	800	520	2860	980	1090	300	675/ 610	140	A
SWOBK 10	10- 50	2760	900	585	1000	650	4250	980	1090	300	675/ 610	180	A
SWOBK 15	15- 75	3364	1350	878	1500	975	3892	1035	1040	300	740/ 660	200	B
SWOBK 20	20- 100	5760	1800	1170	2000	1300	5838	1035	1040	300	740/ 660	280	B
SWOBK 25	25- 125	7500	2250	1463	2500	1625	2900	1850	2120	400	1400/ 1255	245	C
SWOBK 30	30- 150	7500	2700	1755	3000	1950	2900	1850	2120	400	1400/ 1255	250	C
SWOBK 35	35- 175	10000	3150	2048	3500	2275	4050	1850	2120	400	1400/ 1240	415	C
SWOBK 40	40- 200	10000	3600	2340	4000	2600	4050	1850	2120	400	1400/ 1240	420	C
SWOBK 45	45- 225	12500	4050	2632	4500	2925	4670	1850	2120	400	1400/ 1225	445	C
SWOBK 50	50- 250	12500	4500	2925	5000	3250	4670	1850	2120	500	1300/ 1125	450	C
SWOBK 55	55- 275	15000	4950	3217	5500	3575	5820	1850	2120	500	1300/ 1125	615	C
SWOBK 60	60- 300	15000	5400	3510	6000	3900	5820	1850	2120	500	1300/ 1125	620	C
SWOBK 65	65- 325	17500	5850	3802	6500	4225	6440	1850	2120	500	1300/ 1125	645	C
SWOBK 70	70- 350	17500	6300	4095	7000	4550	6440	1850	2120	500	1300/ 1125	650	C
SWOBK 75	75- 375	20000	6750	4387	7500	4875	7590	1850	2120	500	1300/ 1125	815	C
SWOBK 80	80- 400	20000	7200	4680	8000	5200	7590	1850	2120	500	1300/ 1125	820	C
SWOBK 85	85- 425	22500	7650	4972	8500	5525	8210	1850	2120	600	1200/ 1080	845	C
SWOBK 90	90- 450	22500	8100	5265	9000	5850	8210	1850	2120	600	1200/ 1080	850	C
SWOBK 95	95- 475	25000	8550	5557	9500	6175	9360	1850	2120	600	1200/ 1080	1015	C
SWOBK 100	100- 500	25000	9000	5850	10000	6500	9360	1850	2120	600	1200/ 1080	1020	C