

## SWOBBK

Separator de uleiuri si hidrocarburi cu trapa de namol/decantor, filtru coalescent si dublu by-pass

Debit: 3 – 100 l/s


Clasa de retentie: <5 mg/l

### Echipament:

- camera decantare
- camera separare
- filtru coalescent
- by-pass (x 10)
- dispozitiv prelevare probe
- obturator automat
- ventilatie

### Echipamente optionale:

- extensii
- alarma
- capac carosabil

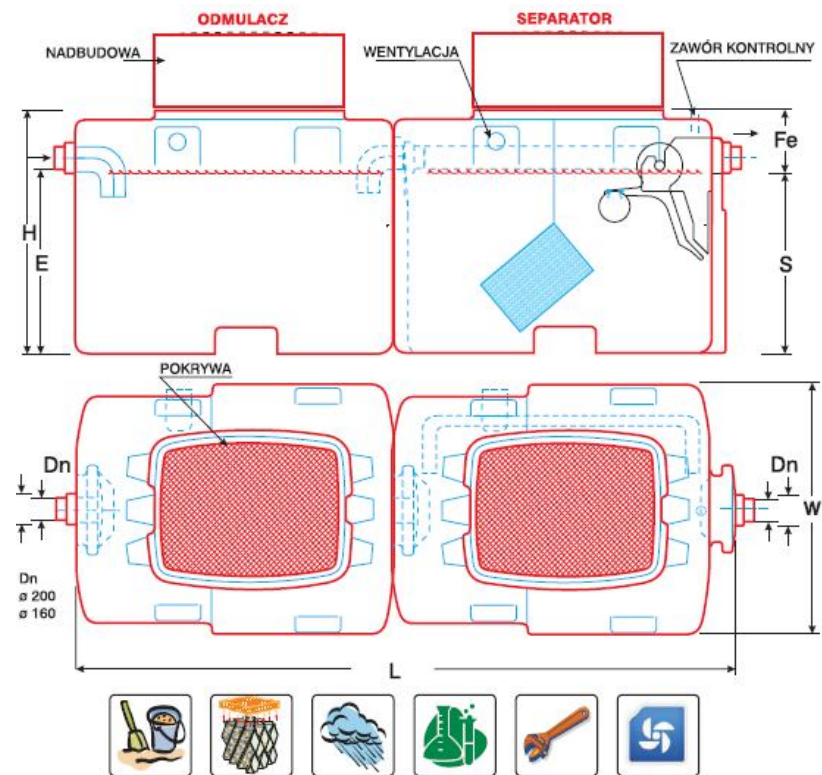

MODEL	Debit	Volum total	Volum camera separare	Volum hidrocarburi depozitate	Volum camera decantare	Volum nanol depozitat	L	W	H	Dn	E/S	Greutate	Extensii
M.U.	l/s	l	l	l	l	l	mm	mm	mm	mm	mm	kg	Type
SWOBBK 3	3- 30	1840	270	176	300	195	2860	980	1090	300	700/ 660	125	A
SWOBBK 5	5- 50	1840	450	293	500	325	2860	980	1090	300	700/ 660	130	A
SWOBBK 6	6- 60	2760	540	351	600	390	4250	980	1090	300	720/ 690	140	A
SWOBBK 8	8- 80	2760	720	468	800	520	4250	980	1090	300	720/ 690	145	A
SWOBBK 10	10- 100	3364	900	585	1000	650	3892	1035	1040	300	740/ 690	185	B
SWOBBK 15	15- 150	3364	1350	878	1500	975	3892	1035	1040	300	740/ 660	205	B
SWOBBK 20	20- 200	7500	1800	1170	2000	1300	2900	1850	2120	300	1550/ 1505	245	C
SWOBBK 25	25- 250	7500	2250	1463	2500	1625	2900	1850	2120	400	1400/ 1255	250	C
SWOBBK 30	30- 300	7500	2700	1755	3000	1950	2900	1850	2120	400	1400/ 1255	255	C
SWOBBK 35	35- 350	10000	3150	2048	3500	2275	4050	1850	2120	400	1400/ 1255	415	C
SWOBBK 40	40- 400	10000	3600	2340	4000	2600	4050	1850	2120	400	1400/ 1255	420	C
SWOBBK 45	45- 450	12500	4050	2632	4500	2925	4670	1850	2120	400	1400/ 1255	445	C
SWOBBK 50	50- 500	12500	4500	2925	5000	3250	4670	1850	2120	500	1300/ 1125	450	C
SWOBBK 55	55- 550	15000	4950	3217	5500	3575	5820	1850	2120	500	1300/ 1125	615	C
SWOBBK 60	60- 600	15000	5400	3510	6000	3900	5820	1850	2120	500	1300/ 1125	620	C
SWOBBK 65	65- 650	17500	5850	3802	6500	4225	6440	1850	2120	500	1300/ 1125	645	C
SWOBBK 70	70- 700	17500	6300	4095	7000	4550	6440	1850	2120	500	1300/ 1125	650	C
SWOBBK 75	75- 750	20000	6750	4387	7500	4875	7590	1850	2120	500	1300/ 1125	815	C
SWOBBK 80	80- 800	20000	7200	4680	8000	5200	8210	1850	2120	500	1300/ 1125	845	C
SWOBBK 85	85- 850	22500	7650	4972	8500	5525	9360	1850	2120	600	1200/ 1080	1015	C
SWOBBK 90	90- 900	25000	8100	5265	9000	5850	9360	1850	2120	600	1200/ 1080	1020	C
SWOBBK 95	95- 950	27500	8550	5557	9500	6175	9980	1850	2120	600	1200/ 1080	1045	C
SWOBBK 100	100- 1000	27500	9000	5850	10000	6500	9980	1850	2120	600	1200/ 1080	1050	C