

STOP

Separator de grasimi cu decantor si camera de pompare


Debit: 1,5 – 20 l/s

Echipment:

- camera decantare
- camera separare
- grup pompare
- camera pompare
- ventilatie

Echipment optional:

- extensii
- alarma
- capac carosabil

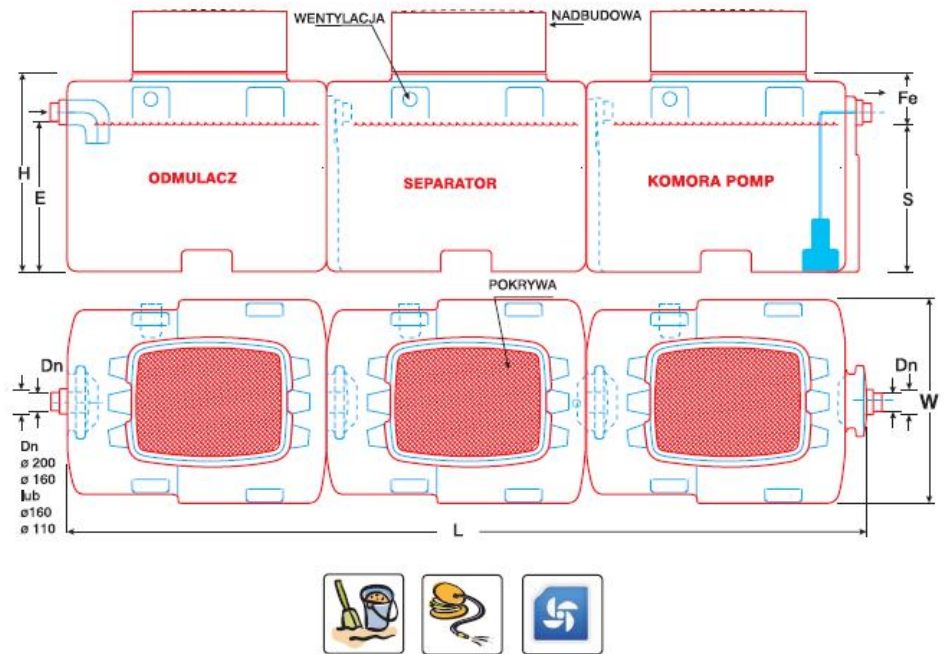

MODEL	Debit	Volum total	Volum camera separare	Volum grasimi depozitate	Volum camera decantare	Volum namol depozitat	Volum statie pompare	L	W	H	Dn	E/S	Greutate	Extensii
M.U.	l/s	l	l	l	l	l	l	mm	mm	mm	mm	mm	kg	Type
STOP 1	1,5	1840	150	98	150	98	880	2860	980	1090	110	740/ 710	120	A
STOP 2	2	1840	200	130	200	130	880	2860	980	1090	110	740/ 710	125	A
STOP 3	3	1840	300	195	300	195	880	2860	980	1090	110	740/ 710	130	A
STOP 6	6	2602	500	390	500	390	880	3500	1035	1040	160	810/ 780	160	A + B
STOP 8	8	2760	800	520	800	520	880	4250	980	1090	160	720/ 690	180	A
STOP 10	10	4284	1000	650	1000	650	880	5500	1035	1040	160	800/ 670	180	A + B
STOP 15	15	4284	1500	975	1500	975	880	5500	1035	1040	200	800/ 670	200	A + B
STOP 20	20	5966	2000	1300	2000	1300	880	7426	7426	1040	200	800/ 670	360	A + B